

# D Montage Pressflansch Ecoguss/Practicus

GB Assembly of pressure sealing flange for Ecoguss and Practicus

F Montage bride de pression compression Ecoguss/Practicus

I Montaggio flangia a pressione Ecoguss/Praticus

NL persafdichtingsflens Ecoguss / Practicus

PL Montaż dociskowego kołnierza uszczelniającego Ecoguss/Practicus

Art. Nr. 48407










no. art 48407

Art Nr 48407

cod. art. 48407

art.nr 48407

Art. nr 48407

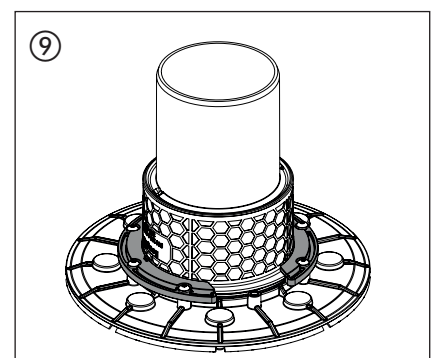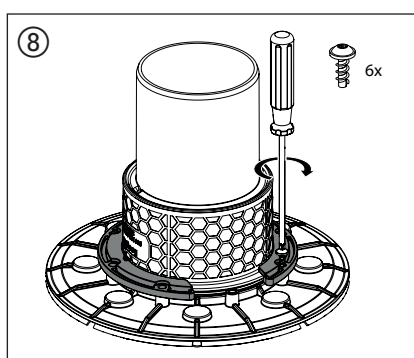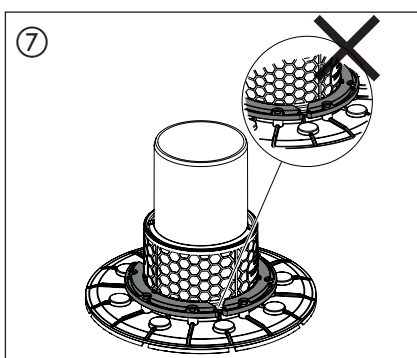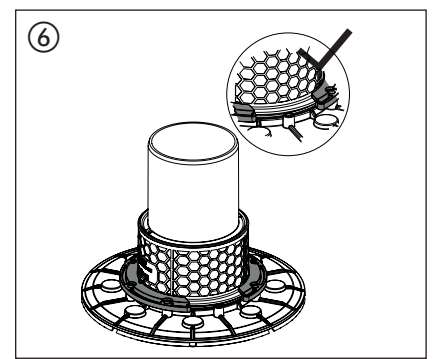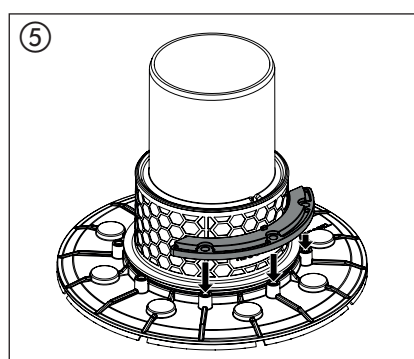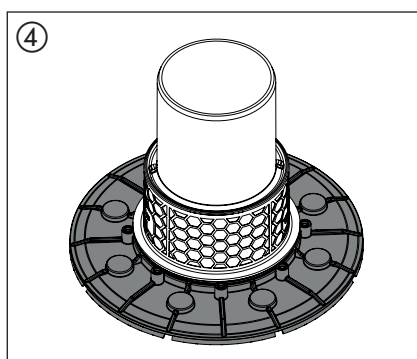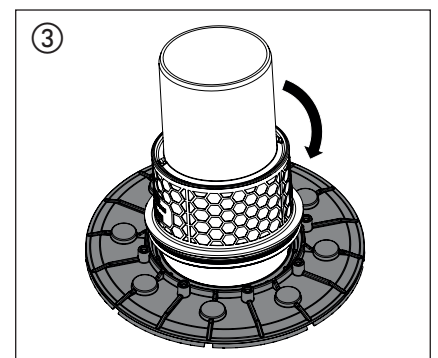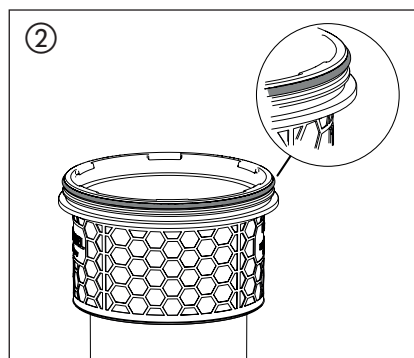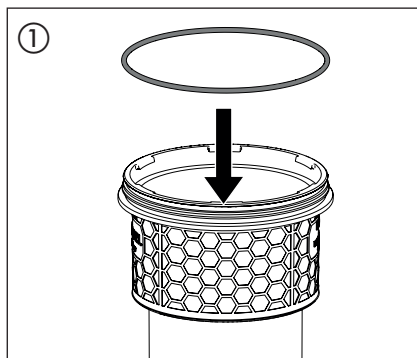

**Maximale Belastung 150 kg / GB: maximum load class 150 kg F : Classe de charge maximale 150kg / IT: Carico massimo 150kg / NL: Maximale belastingsklasse 150 kg / PL: Maksymalna klasa obciążenia 150 kg**