


Aqualift S Compact lift stat. Tronic, GTF 1200, res., Floor slab, bl.

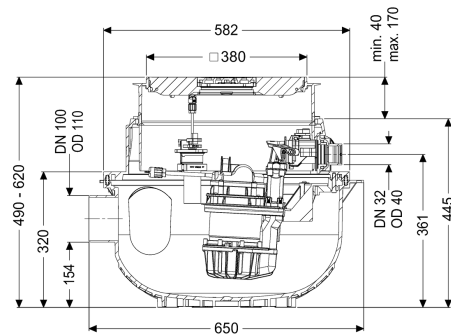

Article information

Item no.: 281250SC
 GTIN: 4026092094884
 Price group: 20

Advantages

- Space-saving due to installation in floor slab with integrated drainage function
- Easy retrofitting from Mono to Duo possible
- Quiet operation, as the pump installation does not cause any structure-borne sound emissions.

Description

The ready to plug in lifting station for faecal-free wastewater is equipped with one or two submersible pumps and a backflow preventer. The collection tank made of permanently resistant polymer (PE) has an open pump tank. One-handed closures enable easy removal of the integrated components. The system for installation in the floor slab is preassembled for final installation on site.

Variant

Type of system:

Resistant:

Pump control:

Backflow preventer:

Single unit

Resistant to waste water containing salt, softener and condensate

Control unit

integrated

General characteristics

Colour:

Standard:

Type of wastewater:

Installation situation:

Delivery state:

black

EN 12050-2

without sewage

floor slab installation

Installation-ready (connection parts must be connected on site)

System type:

Tronic

| | |
|--|-------------------------------------|
| Dimensions | |
| Net weight: | 18,27 kg |
| Gross weight: | 19,77 kg |
| Groundwater resistant from lower edge of base section: | 3000 mm |
| Installation depth: | 490 - 620 mm |
| Type of height adjustability: | vertically adjustable upper section |
| Length: | 617 mm |
| Width: | 585 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |

| | |
|--------------------------------|-------|
| Tank/drain body | |
| Pressure pipe connection (DN): | 32 |
| Pressure pipe connection (OD): | 40 mm |
| Inlet nominal size (DN): | 100 |
| Pumping volume: | 20 l |
| Tank volume: | 65 l |

| | |
|--------------------|-----------------|
| Coverage features | |
| Type of cover: | Cover plate |
| Cover material: | Polymer |
| Colour of cover: | black |
| Width of cover: | 366 mm |
| Length of cover: | 366 mm |
| Drainage function: | yes |
| Locking: | Lock & Lift |
| Load class: | K 3 (EN 1253-1) |

| | |
|--|---------------------|
| Pumping device | |
| Pump: | GTF 1200 resistant |
| Number of pumps: | 1 |
| Weight, pump: | 10 kg |
| Connection type: | coded plug |
| Protection class: | I |
| Insulation class: | F |
| Protection class (pump): | IP 68 (3m) |
| Max. temperature (permanent) of conveyed material: | 40 °C |
| Hot water resistance for a short time (2 min): | 80 °C |
| Max. pumping capacity: | 15,5 m³/h |
| Max. pumping height: | 9 m |
| Speed: | 2650 U/min |
| Power P1: | 1,4 kW |
| Power P2: | 0,84 kW |
| Operating mode: | S1 |
| Type of pump connection cable: | H07RN-F 3G 1.5 mm² |
| Impeller type: | Multi-vane impeller |
| Free passage: | 30 mm |

| | |
|---|-----------------------------|
| Length of mains cable for pump: | 5 m |
| Rated current: | 6,2 A |
| Control | |
| Control unit: | Comfort |
| Control unit function: | With alarm message |
| Motor protection switch: | yes |
| Alarm sensor: | optical probe |
| Level measurement instrument: | Immersion pipe |
| Type of level measurement: | pneumatic |
| Protection class control unit: | IP 54 |
| Mains frequency: | 50 Hz |
| Operating voltage: | 230 V |
| Connection type: | coded plug |
| Length of mains cable for control unit: | 1,4 m |
| Potential-free contact: | optional |
| GSM interface: | yes |
| USB interface: | yes |
| Log book function: | yes |
| Multi-line display: | yes |
| Battery buffering: | yes |
| Self-diagnosis system (SDS): | yes |
| Warning equipment version: | acoustic and optical signal |
| Type of fuse required (control unit): | C 16 A |