


## The Ultraflat 54 floor drain DN 50, enclWPM, Des grating, Lock&Lift

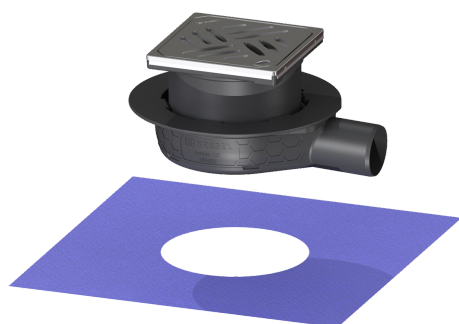

### Article information

Item no.: 44750.63  
GTIN: 4026092080870  
Price group: 10

### Advantages

- including removable odour trap in the upper section
- Low installation depth
- Scientifically confirmed sound insulation effect

### Description

The Ultraflat 54 floor drain is suitable for indoor floor drainage. The polymer drain is equipped with a removable odour trap in the upper section. Open seepage water opening, no flooding of the waterproofing level in the event of build-up.

Variant	
System:	125
Seepage opening:	optional
Waterproofing layer on the drain body:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Water exposure class in accordance to DIN 18534-1 (up to and including):	W2-I
Sealing water height:	22 mm
General characteristics	
Nominal size (DN):	50
Outer diameter (OD):	50 mm
Odour trap:	included
Sustainable:	through the use of recycled material
Dimensions	
Vertical adjustment:	70 - 121 mm
Net weight:	0,87 kg
Gross weight:	1,02 kg
Type of height adjustability:	vertically adjustable upper section
Length:	246 mm
Width:	200 mm
Height:	54 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

Tank/drain body	
Number of outlets:	1
Material of drain body:	ABS
Coverage features	
Type of cover:	Design cover
Cover material:	Stainless steel 14301
Colour of cover:	silver
Width of cover:	120 mm
Height of cover:	16 mm
Length of cover:	120 mm
Frame material:	Stainless steel 14301
Locking:	Lock & Lift
Load class:	L 15 (EN 1253-1)
Grating design:	Kessel
Rim width:	132 mm
Rim length:	132 mm
Shape of upper section:	square
Upper section material:	ABS