


## Shower channel Linearis Compact L: 450 mm, DN50, enclWPM, 304SSTcov, K3

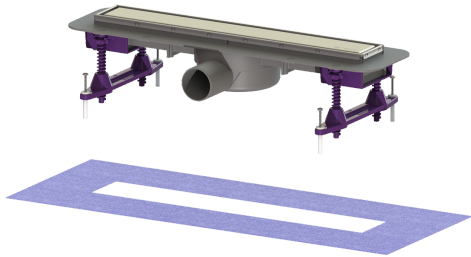

### Article information

Item no.: 45600.60  
GTIN: 4026092048160  
Price group: 10

### Advantages

- Individual design with reversible stainless steel insert
- Low installation depth
- Highest fire protection standards

### Description

The Linearis Compact shower channel with welded on drain body made of ABS is suitable for indoor linear drainage. If inserted upside down, the stainless steel insert can be tiled individually. Including prepared seepage water openings and odour trap.

#### Variant

|                                                                          |                                                                 |
|--------------------------------------------------------------------------|-----------------------------------------------------------------|
| System:                                                                  | 125                                                             |
| Seepage opening:                                                         | prepared                                                        |
| Waterproofing layer on the upper section:                                | Enclosed sealing collar to be glued (bd) according to DIN 18534 |
| Water exposure class in accordance to DIN 18534-1 (up to and including): | W2-I                                                            |
| Sealing water height:                                                    | 22 mm                                                           |
| Discharge rate (l/s) with 10 mm threshold:                               | 0,6                                                             |
| Discharge rate (l/s) with 20 mm threshold:                               | 0,7                                                             |
| Discharge rate (l/s) without threshold:                                  | 0,5 mm                                                          |

#### General characteristics

|                      |          |
|----------------------|----------|
| Nominal size (DN):   | 50       |
| Outer diameter (OD): | 50 mm    |
| Odour trap:          | included |

#### Dimensions

|                          |             |
|--------------------------|-------------|
| Net weight:              | 1,32 kg     |
| Gross weight:            | 1,83 kg     |
| Outer dimension, length: | 515 mm      |
| Installation depth:      | 80 - 140 mm |
| Width:                   | 191 mm      |
| Height:                  | 80 mm       |
| Packaging dimension:     | length      |

|                         |                       |
|-------------------------|-----------------------|
| Packaging dimension:    | width                 |
| Packaging dimension:    | height                |
| Tank/drain body         |                       |
| Number of outlets:      | 1                     |
| Material of drain body: | ABS                   |
| Coverage features       |                       |
| Type of cover:          | Stainless steel cover |
| Cover material:         | Stainless steel 14301 |
| Colour of cover:        | silver                |
| Surface:                | Brushed SST           |
| Frame material:         | Stainless steel 14301 |
| Load class:             | K 3 (EN 1253-1)       |
| Grating design:         | optionally tileable   |
| Rim width:              | 66 mm                 |
| Rim length:             | 450 mm                |
| Max. flooring height:   | 15 mm                 |
| Shape of upper section: | square                |
| Upper section material: | ABS                   |