



Variofix upper section System 200, slot grat., 304 SST, L 15

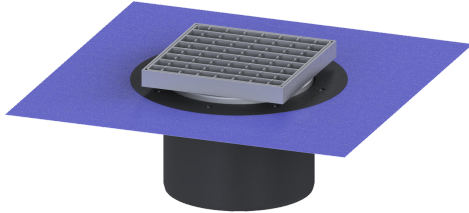

Article information

Item no.: 48969
 GTIN: 4026092005132
 Price group: 70

Advantages

- Different covers selectable
- Including waterproofing membrane

Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

Variant

System:

Waterproofing layer on the upper section:

Water exposure class in accordance to DIN 18534-1 (up to and including):

200

Enclosed sealing collar to be glued (bd) according to DIN 18534

W3-I

General characteristics

Sustainable:

through the use of recycled material

Dimensions

Vertical adjustment:

30 - 50 mm

Net weight:

2,99 kg

Gross weight:

3,72 kg

Diameter:

320 mm

Type of height adjustability:

vertically adjustable upper section

Height:

150 mm

Packaging dimension:

length

Packaging dimension:

width

Packaging dimension:

height

Coverage features

Type of cover:	Slotted cover
Cover material:	Stainless steel 14301
Colour of cover:	silver
Height of cover:	28 mm
Min. flooring height:	30 mm
Surface:	pickled
Locking:	placed
Load class:	L 15 (EN 1253-1)
Grating design:	Cross
Rim width:	200 mm
Rim length:	200 mm
Max. flooring height:	50 mm
Upper section:	adjustable in three dimensions
Shape of upper section:	square
Upper section material:	ABS
Mesh size:	23 x 23 mm