


## Box Channel Ferrofix glued flange H: 6mm, 400x3050mm

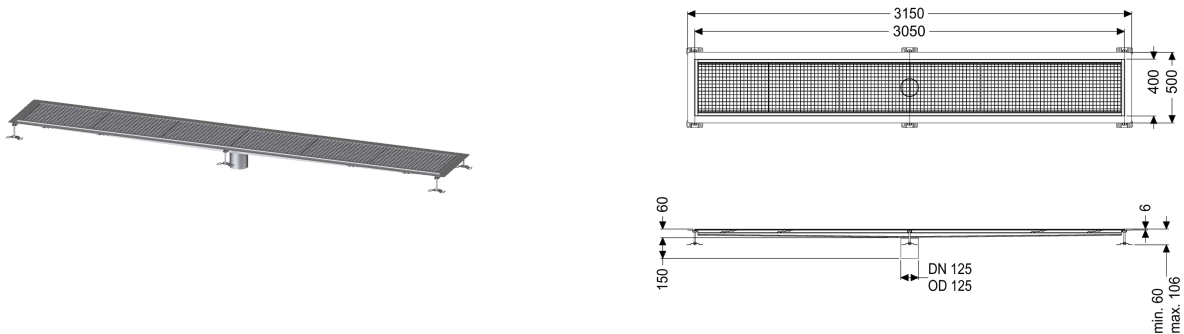

### Article information

Item no.: 6240300  
GTIN: 4026092098875  
Price group: 80

### Advantages

- Made of particularly a hygienic and mechanically highly resistant stainless steel
- Variably combinable with suitable drain bodies

### Description

The Ferrofix box channel made of stainless steel with a material thickness of 1.5 mm (pickled in the immersion bath) is equipped with ground crosspieces, longitudinal and transverse gradients, feet for height adjustment and stainless steel outlet nozzles. The channel profile is suitable for thin-layered floorings (e.g. epoxy resin) and has an all-round adhesive rim (6 mm deep and 50 mm folded outwards) with welded mitres. The glued flange is also suitable for connecting waterproofing.

#### Variant

Waterproofing layer on the upper section: Adhesive flange (suitable for moisture barriers)

#### General characteristics

Nominal size (DN): 125  
Outer diameter (OD): 125 mm  
Glued flange height: 6 mm

#### Dimensions

Net weight: 10 kg  
Gross weight: 10 kg  
Length: 3050 mm  
Width: 400 mm  
Height: 60 mm

#### Coverage features

Type of cover: Slotted cover

|                         |  |
|-------------------------|--|
| Colour of cover:        | silver   |
| Locking:                | placed   |
| Load class:             | L 15 (EN 1253-1)                                     |
| Slip resistance class:  | R12 according to DIN 51130; C according to DIN 51097 |
| Upper section material: | Stainless steel 14301                                |