


Layer thickness measuring device SonicControl, type OA

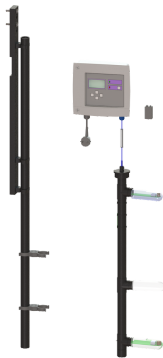

Article information

Item no.: 917826
 GTIN: 4026092047316
 Price group: 60

Description

Type OA SonicControl layer thickness measuring device for light liquid separators, with ultrasonic sensor for monitoring and reporting of the oil layer thickness with centimetre accuracy. With mains connection, battery backup and optional connection possibility for a remote signal generator. Incl. fixing set for simple on-site assembly and maintenance.

Cable (for sensor) can be extended on site up to 60 m.

Control unit with optical and acoustic alarm, electronic logbook designed for 12 months, logbook readout option via USB interface.

General characteristics

Approval: BVS 11 ATEX E 040 X
 Cable length: 30 m

Dimensions

Net weight: 6,23 kg
 Gross weight: 7,02 kg
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Pumping device

Connection type: Schuko (earthed contact) 2-pin

Control

Control unit: yes
 Standby power: 3,4 W
 Protection class control unit: IP 54
 Connection type: Schuko (earthed contact) 2-pin
 Length of mains cable for control unit: 1,45 m
 Potential-free contact: yes
 GSM interface: yes
 USB interface: yes
 Log book function: yes

Multi-line display:	yes
Battery buffering:	yes
Self-diagnosis system (SDS):	yes